

FARE INTEGRATION IN REGIONAL TRANSIT SERVICES

Domenico Gattuso, Giuseppe Musolino

Mediterranea University of Reggio Calabria

Department of Computer Science, Mathematics, Electronics and Transportation

Reggio Calabria - Italy

e-mails: musolino@ing.unirc.it, gattuso@ing.unirc.it

Abstract

The paper presents a general procedure, supported by a system of simulation models, for the estimation of impacts on user (demand level variations) and on transit companies (management revenues), due to the implementation of an integrated fare system in regional transit services. In particular, the demand is assumed to be elastic to the fare at the modal and path choice dimensions.

The procedure is applied to the transit system of an Italian regional area. The effects of introduction of an integrated fare system are simulated and compared in terms of impacts on transport demand and management revenues.

Keywords: Transit; Fare integration; Schedule-based approach

Topic area: C1 Integrated Planning of Transport Systems

1. Introduction

In the last years, many regional and metropolitan areas experimented with success integrated fare systems in transit services, due to the modifications of European and national legislations. The implementation of an integrated fare system involves decisional implications concerning the necessity to activate comprehensible and easy usable fares for the user, to identify the management service revenues and their allocation among transit companies. The actual tendency is to move from non integrated fare systems, where each transit company has his own fare structure and levels, towards integrated zone fare systems, where a single zone fare structure is defined, accepted and adopted by all transit companies operating in the area. A systematic description of fare integration experiences in transit services of some European metropolitan and regional areas is reported in Montella et al. (2002), Gattuso et al. (2002a), Gattuso and Musolino (2003).

Methods for design integrated fare systems for transit services can be classified according to a "what if" (simulation) approach and a "what to" (optimization) approach (Figure 1).

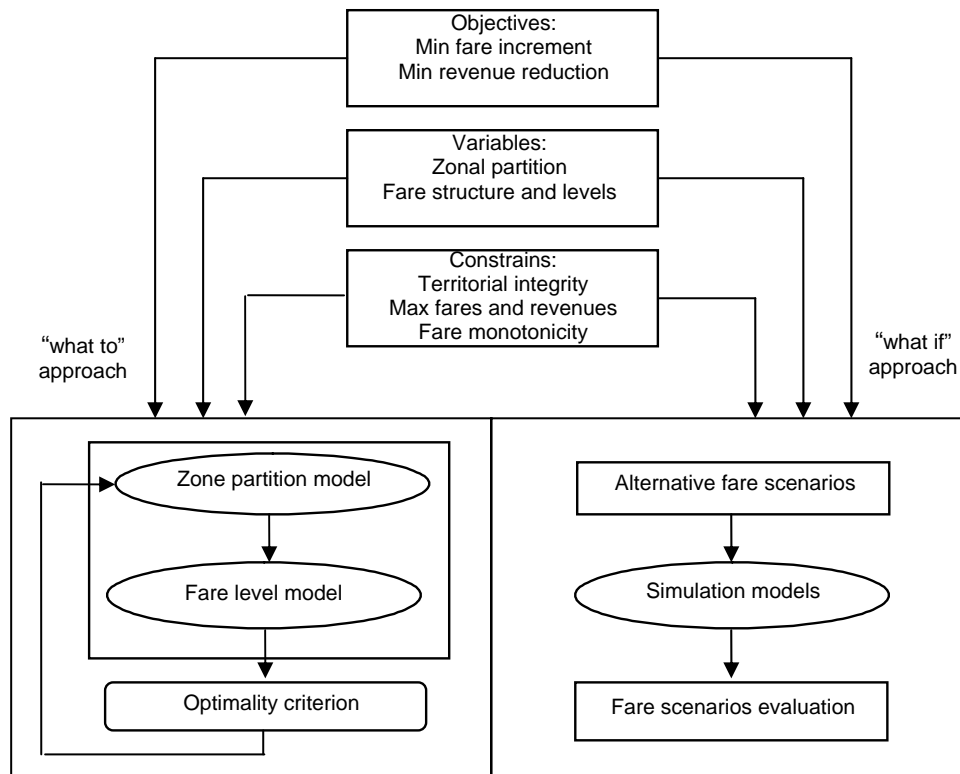


Figure 1. "What to" and "what if" approaches for integrated zone fare system design.

In the first case many alternative fare system scenarios (zone partition and fare structure and levels) are exogenously defined on the base of experiences or specific knowledge of the examined area. Such configurations are simulated through a system of simulation models and compared with the support of some evaluation indicators. In the second case, fare systems scenarios are generated automatically by means of an optimization model, which is usually composed by a zone partition model and a fare level model. The solutions of the optimization model are analyzed and evaluated through an iterative procedure. Both approaches have, in a general case, the minimum fare increment for the users and the minimum revenue reduction for the transit companies as objectives; the zone partition of the area and the fare structure and levels as decision variables; the territorial integrity of the zones, some thresholds for maximum variations of fares levels and revenues, fare monotonicity (increasing fares with trip length) as constraints.

Some works based on "what if" approach are proposed by Italian Railways (1995) and more recently from Gattuso et al. (2002b, 2003) in the behalf of an Italian Research Project (AA.VV. 2002). In these last works a procedure for management revenues estimation deriving from the definition of alternative fare systems in a regional area is proposed. Some works based on "what to" approach are focused to the optimal definition of a zone fare system, with the objectives to minimize fare increments for the users and revenue reductions for the operating companies (Schöbel, 1996; Schöbel et al, 1999; D'Acerno et al., 2001; Pratelli and Schoen, 2002; Hamacher and Schöbel, 2003; Babel and Kellerer 2003).

In the above works, the effects of the implementation of an integrated zone fare system are simulated and evaluated, assuming rigid demand.

The paper presents a general procedure, which uses a system of simulation models for the estimation of impacts on user (demand level variations) and on transit companies (management revenues), due to the implementation of an integrated fare system in regional

transit services. In particular, the demand is assumed to be elastic to the fare at the modal and path choice dimensions.

The paper is articulated in three sections. In the first section, the general procedure for fare systems simulation and the system of simulation models for the estimation of demand levels and management revenues in a regional area are presented. The second section contains an application of the procedure to the Province of Reggio Calabria (Italy); the effects deriving from the definition of different fare systems have been simulated and compared in terms of demand levels and management revenues. Finally, the third section reports the conclusions and the research perspectives.

2. General procedure for fare systems simulation

The proposed procedure, based on “what if” approach, allows to simulate the effects of the implementation of an integrated fare system in regional transit services on users (in terms of demand levels) and on transit companies (in terms of management revenues).

The procedure is articulated according the scheme presented in Figure 2 and involves specifications of a supply model, a fare model (it is separated from other components of the supply model), a demand model, a transit assignment model and a revenues model.

The starting step concerns the definition of the integrated fare system scenario, simulated through a fare model. Road infrastructures and transit services are simulated through a supply model. The demand can be simulated through a system of models that, from user specific, level-of-service and cost attributes (fares), provides modal origin-destination (O/D) matrices. At this point, the modal demand levels are evaluated with reference to prefixed constrains (i.e., minimum thresholds given by the demand levels in the current transit system modes), described in detail below. If such constrains are not satisfied the fare system scenario can be modified, otherwise modal O/D matrices are assigned to the network through an assignment model. Cost attributes are taken into account in the definition of systematic utility (or cost) connected to each path. So, it is possible to simulate the effects of fare system scenario on the demand in the dimensions of mode and path choice. The assignment model (demand-supply interaction) gives back the flows (or loads) on each element of the network (link), that represent the input, together with fare matrices, for the revenues model. The estimated revenues are evaluated with reference to prefixed constrains (i.e., minimum thresholds of revenues/cost rates imposed from legislation, as in Italy). If such constrains are satisfied the procedure ends, otherwise, there is a new feedback to the starting step.

The decision variables are represented by the fare system (zone partition, fare structure and levels), assuming the network topology and performances to be constant. The objectives can be the minimum fare increment for the users and/or the minimum revenue reduction for the operating companies. The constrains are given by thresholds for demand levels and fare revenues, for example:

- estimated demand levels for every transit mode for the fare system scenario $(d^T)^S$ must be not less ($\lambda \geq 1$) than demand levels for the current fare system $(d^T)^C$:

$$(d^T)^S \geq \lambda (d^T)^C$$

- estimated fare revenues for the fare system scenario $(R)^S$ must be not less than prefixed thresholds of the revenues/costs rate (i.e., $\eta \geq 0,35$, as in Italy):

$$(R)^S \geq \eta(MC)$$

where:

T, transit service system;
 S, fare system scenario;
 C, current fare system;
 R, fare revenues;
 MC, operating management costs.

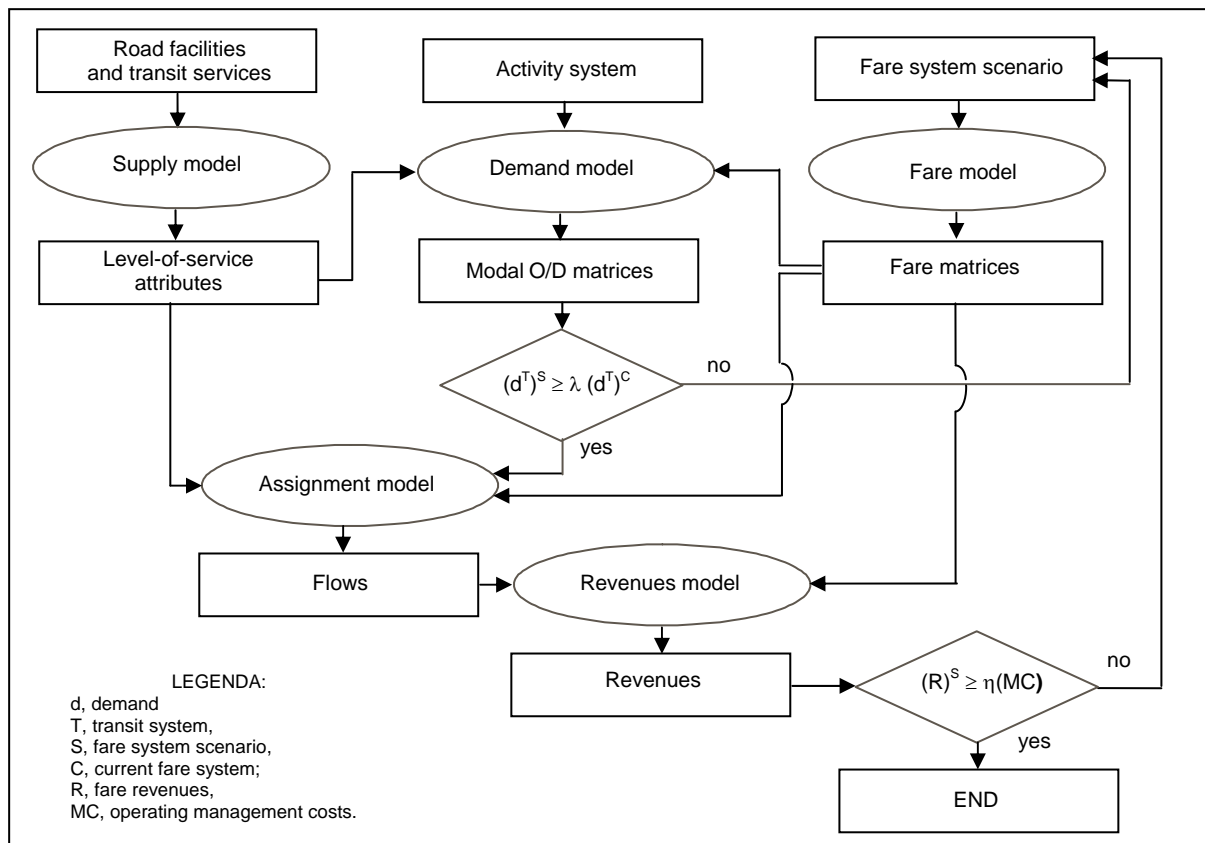


Figure 2. Graphical scheme of the general procedure.

2.1. Supply model (road facilities, transit services)

Road facilities are modelled through a network model, composed by a topological graph. Transit low-frequency services (present in regional areas) are represented through a run-based supply model, where the graph is made up by a service sub-graph (timetable) and an access/egress sub-graph. Cost functions for links on the two sub-networks are assumed to be separable and not flow-dependent (not congested network).

Different run-based supply models for low-frequency transit services are presented in literature (Anez et al., 1996; Florian, 1998; Nuzzolo et al., 2003). In this work, the mixed line-based/database supply model from Florian (1998) is considered. It uses a line-based network model together with a timetable database; in particular, it uses a line-based approach to describe spatially the service network topology in terms of routes, lines and stops and data associates to nodes and links to define runs on the network.

The run-based supply model is able to simulate each mode/service at a run level due to the characteristics (low-frequency) of the service.

It is also able to simulate a “mixed” mode, which is composed by two transit modes, through the explicit representation of intermodal transfer nodes. Two approaches exist in literature to simulate intermodal transfers. According to the first one, a supply model is implemented, able to integrate all transport modes in a single network and to represent, through specific nodes and links, intermodal transfers. The network is quite complex and

need the definition of some criteria in order to prevent the choice of not feasible paths. According to the second one, different supply models are implemented for each transport mode. The connection among these networks is ensured by the presence in each of them of fictitious origin and/or destination nodes, which represent the intermodal transfer nodes. So, the path on the mixed mode is composed from the path on the first network from the origin node to the intermodal transfer node (fictitious destination on the first network) and the path on the second network from the intermodal transfer node (fictitious origin on the second network) to the real destination (Figure 3). The network is less complex, if intermodal transfer nodes are not numerous and are explicitly defined. This second approach is adopted in this work for the representation of the mixed mode.

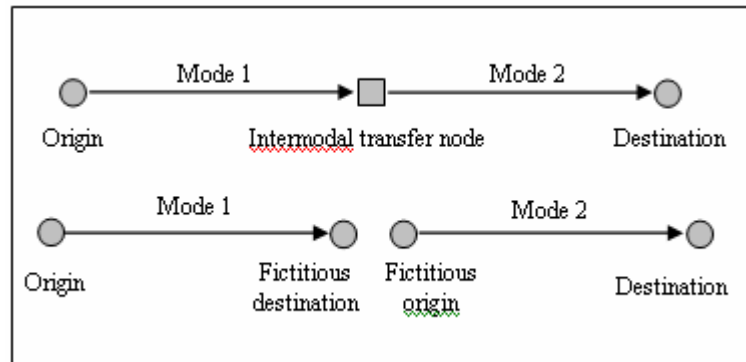


Figure 3. Intermodal transfer node representation.

2.2. Fare model

Fare model is a component of the supply model, but it is separately treated here because cost attributes (fare) are the ones that change due to the implementation of an integrated fare system.

Different fare models can be specified to represent different fare systems. Generally, fare (p) is the composed by an access fare to the service (p_0) and a variable on-board fare (p_v), which depends on the use of service. The last one has different specifications in relation to the defined fare structure. Fare models can be linear or not linear; in the following some models are presented able to simulate different fare systems:

- *constant* fare model ($p_v=0$):

$$p = p_0 \quad (1)$$

- *distance* (or *time*) fare model, when p_v depends on travelled distance (d) between origin and destination (or travel time t);

$$p = p_0 + p_v(d) \quad (2.a)$$

$$p = p_0 + p_v(t) \quad (2.b)$$

- *zone* fare model, when p_v depends on the number of crossed zone boundaries (n):

$$p = p_0 + p_v(n) \quad (3)$$

- *origin-destination* fare model, when fare depends on each origin-destination (O/D) couple; according to services provided, distance, specific commercial strategies:

$$p = p_{O/D} \in \mathbf{P}_{O/D} \quad (4)$$

where $P_{O/D}$ in a fare matrix, having as elements fare associated to O/D couple.

Fare models (1), (2) and (3) have a linear specification and simulate additive fares independent from O/D couple and path, while fare model (4) simulate a non additive fare which depends on each O/D couple. In this work, only linear fare models are considered.

2.3. Demand model

Transport demand can be obtained from a direct estimation, from model estimation, from traffic counts. Model estimation provides parameters estimation of the sub-models related to different choice dimensions and allows to forecast demand variations in short, medium and long term.

In this work, in order to evaluate the impacts deriving from the implementation of an integrated fare system, the effects on mode and path choices are explicitly simulated. To such purpose, modal and path choice sets and choice models are specified.

Modal choice set includes individual (car) and transit modes available for users for extraurban trips. Among transit modes, a mixed mode is dealt as a specific mode and is considered as a specific alternative in the choice set. Attributes (especially level-of-service attributes) related to mixed mode derive from the composition of attributes of the first mode from origin to intermodal transfer node and of attributes of the second mode from intermodal transfer node to destination. Such attributes are determined through network loading models with deterministic path choice for both transport modes.

Mode choice model is based on random utility theory (Ben-Akiva and Lerman, 1985; Cascetta, 2001), able to simulate modal split among transport modes.

Modal O/D matrices must be segmented into more detailed time-varying matrices, in order to be congruent to run-based supply model. Demand segmentation is performed according to users desired departure time (DDT) from origin and desired arrival time (DAT) at destination. Usually, DAT is related to home-living trips and DDT to returning trips.

In low-frequency transit systems, path choice set can be composed of selected paths, according to some criteria (Florian, 2003; Nuzzolo et al., 2003), which lead to the generation of a reduces set of feasible paths.

Path choice model (determinist or stochastic) is completely pre-trip and depends on the systematic (or perceived) utilities of each path equal to the opposite of the path costs. Such costs are equal to the sum of two components: additive costs and non additive costs. The first ones derive from the sum of costs (generally time) of links of the path, while the second ones are specific of the path and/or the origin-destination couple.

Access/egress time, earliness/lateness arrive at stop, waiting time, boarding time, on-board time, alighting time are additive costs (in not-congested networks), while fare can be an additive or not additive cost, depending on the fare systems (respectively linear or not linear). For linear fare structures (eq. 2 and 3), it is possible to convert fare monetary cost in temporal cost, assigning the access fare (p_v) to the boarding link and the variable on-board cost (p_v) to the (or some) on-board links. For non linear fare structures (eq. 4), fare cost represents a non additive path cost that can be considered only after the explicitation of all paths.

2.4. Transit assignment model

In low-frequency transit systems, where all runs must be explicitly simulated, transit assignment of demand flow to the network must be performed through a dynamic schedule-based approach, which allows to obtain disaggregate results in terms of on-board loads on each vehicle. Different transit assignment models based on schedule-based

approach are proposed in literature (Florian, 1998, 2003; Nielsen et al., 1999; Nguyen et al., 2001; Nuzzolo et al., 2003). For not-congested networks, transit assignment is simulated with a whit-in day dynamic network loading model which allows to simulate at each time load on links representing services.

2.5. Revenues model

Management revenues are estimated through revenues models which differ according to the fare system, that can be linear or not and can operate in an integrated context or not (Gattuso et al., 2002, 2003).

Table 1 presents revenues models for different fare systems. Models (6) and (10) are applicable having as input demand flows ($d_{O/D}$), while models (5), (7), (8) and (9) are applicable after performing the transit assignment and, generally, need as input demand flows ($d_{O/D}$), flows (f) on some links, the two components of the fare model (p_0 and p_v).

Table 1. Revenues models and required inputs.

<i>Fare system</i>	<i>Integrated</i>	<i>Input</i>	<i>Model</i>
Constant	No	p_0, f_{tr}	$\sum_r \sum_t p_0 f_{tr}$ (5)
	Yes	$p_0, d_{O/D}$	$p_0 \sum_{O/D} d_{O/D}$ (6)
Distance	No	$p_0, p_{vr}, f_{tr}, f_{br}$	$\sum_r \sum_t p_0 f_{tr} + \sum_r \sum_b f_{br} p_{vr}$ (7)
	Yes	$p_0, p_{vr}, d_{O/D}, f_{br}$	$p_0 \sum_{O/D} d_{O/D} + \sum_r \sum_b f_{br} p_{vr}$ (8)
Zone	Yes	$p_0, p_{vw}, d_{O/D}, f_w$	$p_0 \sum_{O/D} d_{O/D} + \sum_w f_w p_{vw}$ (9)
Origin-destination	Yes	$p_{O/D}, d_{O/D}$	$\sum_{O/D} p_{O/D} d_{O/D}$ (10)

t, boarding link; w, on-board link crossing zone boundaries; b, on-board link; r, run; k, path; $d_{O/D}$, demand flow on O/D couple; f, link flow.

Model (5) is applicable for revenues calculation for a not integrated constant fare system, simulated by equation (1). Model (7) is related to a not integrated distance linear fare system (equation 2); it needs as input, for every run (r), flows on boarding links (f_{tr}), flows on on-board links (f_{br}), additive link fare associated to each on-board link depending on link length (p_{vr}). Model (8) is referred to an integrated distance linear structure and it does not require flows on boarding links. Model (9) is applicable for integrated zone linear fare systems and needs as input flows on on-board link crossing zone boundaries (f_w) and additive variable fare associated to each on-board link crossing zone boundaries (p_{vw}).

3. Application to the Province of Reggio Calabria

The procedure is applied to the transit system of the Province of Reggio Calabria, located in the south of Italy. The general objective, in this case, is the evaluation of effects on users and on fare revenues deriving from the modification of a season-ticket (monthly ticket) for users who travel systematically inside the Province for work and study purposes. In particular, two fare systems are simulated: the current *not integrated distance fare system*, where each company sells its own monthly ticket (the price depends on travelled distance between origin and destination) to users not valid for services provided for other companies (users which make modal/service transfers need to buy multiple tickets); and an *integrated zone fare system*, where companies sell a monthly ticket (the price depends on the number of crossed zone boundaries between origin and destination), valid for all services/modes connecting origin and destination.

The steps for the application of the procedure are: *supply representation*, through the network graph (nodes for spatial location of bus stops and rail stations, infrastructural links for spatial connection of nodes, intermodal transfer nodes) and the services timetable (temporal representation of runs: leaving time from the terminus and arriving/leaving time

at stops/stations); *fare system definition*, through the specification and calibration of fare models simulating the two fare systems; *demand estimation* for each mode during an average working day and time-varying O/D demand matrices estimation, *transit assignment* of time-varying O/D demand matrices to the run-based network; *revenues estimation*.

3.1. Supply representation

In the examined area, the road system presents local and regional roads, while a highway runs along the Thyrrenian coast. The total length of road network is 1097 Km. Many transit companies (27) operate in the area with 505 lines/day and 1344 runs/day, providing connections inside the province. Two transit modes are present: bus and rail, providing mono-class services. No intra/intermodal integration (fare and timetable) exists, however a small number of intermodal transfers are present in the major coastal towns. Rail lines run along the coast connecting all coastal towns, while bus lines connect each other all coastal towns and hilly villages (Figure 4). Some characteristics of the two transit modes are described in Table 2.

A network graph for each mode provides the spatial representation of transit services, while timetable provides their temporal representation. Mixed mode representation is relatively easy, due to the small number of intermodal transfer nodes and the transit system structure (Figure 4). Therefore, mixed mode is derived from the composition of the rail mode (running along the coast) and of the bus mode (running from sea to mountains and vice versa). Four intermodal transfer nodes are defined (Reggio Calabria, Gioia Tauro, Melito Porto Salvo and Locri), where it is possible the transfer from bus system to rail one and vice versa. Intermodal transfer nodes are selected after an empirical evaluation of the number of bus and train runs stopping at each bus stop and rail station of the network.

Table 2. Bus and rail characteristics.

	Bus	Rail
Network length [km]	1097	203
Number of stops	269	36
Number of lines/day	428	77
Number of runs/day	1132	212
Commercial speed [km/h]	56.5	36.2
Number of operators	26	1

3.2. Fare systems definition

Two different fare systems are simulated. The first is a non integrated distance linear fare system. A fare model is specified and calibrated in a previous study (Gattuso et al., 2002, 2003) and parameters (Table 3) are calibrated for the two existing modes (bus and train) for a monthly season-ticket:

$$p = p_0 + \chi d \quad (11)$$

Table 3. Parametres of the non integrated linear distance fare model.

Bus		Rail	
p_0 (€)	χ (€/km)	p_0 (€)	χ (€/km)
0.147	0.019	0.352	0.028

The second is an integrated zone linear fare system, in which the zone fares are defined

according to a previous zone partition. The fare model is specified as follows:

$$p = p_0 + \beta n \quad (12)$$

Three fare levels scenarios are defined assigning different values to parameters p_0 and β , as shown in Table 4.

Table 4. Values of parametres for the integrated zone linear fare model.

Scenario	p_0 (€)	β (€/n)
1	0.45	0.50
2	0.35	0.40
3	0.55	0.60

The Province is divided in 33 fare zones with equal medium diameter of 10 km (Figure 4). Fare zones are designed in order capture the sea-mountain and coastal trips. Each zone has a convex shape and encloses one or more municipalities.

The specification and calibration of the fare models (11) and (12) allow to determine a fare matrix for each fare system, which is necessary in next steps concerning modal demand O/D matrices estimation and transit assignment of time-varying demand flows to the run-based network.

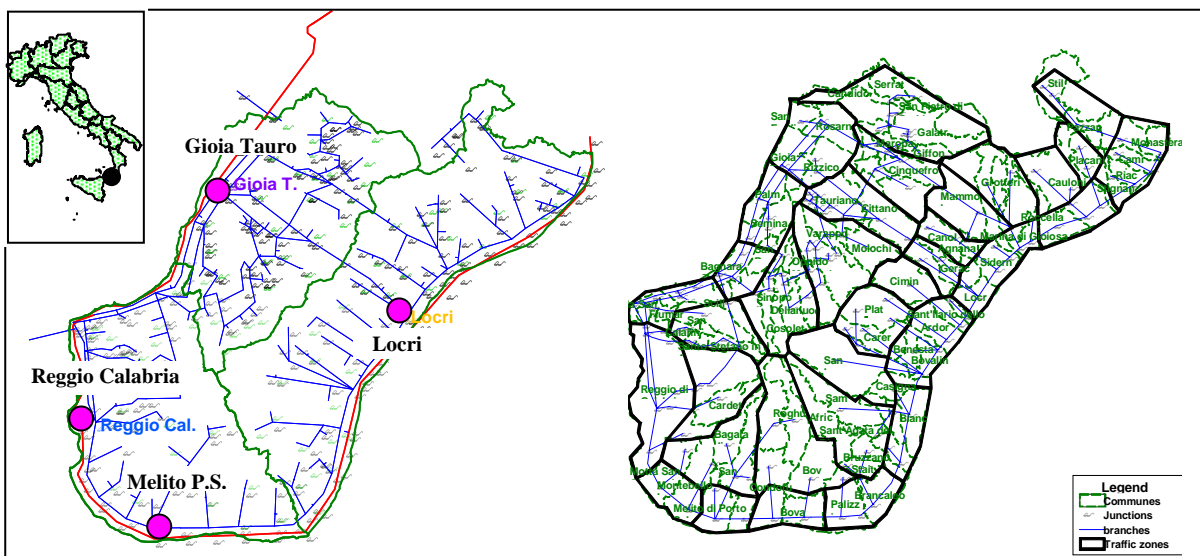


Figure 4. Transit network and zone partition of the Province of Reggio Calabria.

3.3. Demand estimation

The area, with a population of 580000 inhabitants, has been divided in 97 traffic zones, corresponding to the municipalities. The city of Reggio Calabria is the main attraction/emission center and minor towns are located along the coast. The total daily O/D matrix of systematic extraurban trips in the area for all modes and two purposes (work and study) is provided by national statistics institute (ISTAT, 1991).

A disaggregate mode choice model is specified and calibrated in order to split the total daily O/D among transport modes. Modal choice set is composed by four transport modes: car, bus, rail, mixed. The specified mode choice model is a multinomial logit, based on the random utility theory:

$$p(m/od) = \exp(V_{m/od}) / \sum_m \exp(V_{m/od}) \quad (13)$$

with:

$V_{m/od} = \sum_j \beta_j X_{mj}$, systematic utility function associated to mode m ;

β_j , parameters to be calibrated;

X_{mj} , attributes of mode m .

The systematic utility function is a linear combination of level-of-service attributes, defined in Table 5.

The values of attributes are average daily values for each O/D couple. Car on-board travel times are determined through a stochastic equilibrium assignment model. Cost for car mode is fuel cost, assuming a unit fuel consumption of 10 Km/litre and a unit fuel cost of 1 Euro/litre. Bus and rail on-board travel times are determined through a network loading model with a determinist choice of hyperpath. Cost for transit modes (fare) is obtained from models (11) and (12) for each O/D couple (fare matrices). For mixed mode, three more average daily attributes are estimated: average headway between two runs (Inter), average intermodal transfer time (t_t) in the four transfer nodes, percentage use of rail mode (%rail).

Table 5. Attributes in the systematic utility function.

<i>Symbol</i>	<i>Definition</i>
$t_{a/e}$ [hour]	Access/egress time to/from the bus stop or rail station
t_b [hour]	On-board travel time
C [€]	Cost for the monthly season-ticket (bus, rail) or fuel cost (car)
Inter [hour]	Average daily headway between two runs
t_t [hour]	Average daily transfer time
%rail [0,1]	Percentage use of rail mode in the mixed mode
ASA	Alternative specific attributes

Observed data are obtained from a survey executed during a working day at bus stops, rail stations and on-board. A random sample of more than 500 interviews with workers and students performed in a revealed preference way is available.

Model calibration is performed through the maximum-likelihood method. The results of two different specifications related respectively to work and study purposes are presented in Table 6.

Concerning the model related to work purpose, all parameters are negative (unless the %rail one), as expected, and statistically significant, as t-student statistics shows. The positive sign of %rail parameter expresses the users appreciation for the higher reliability and speed of rail services.

On-board and access/egress parameters respect the ratios that it is possible to find in literature. The value of on-board time is satisfactory, while the value of access/egress time seems to be slightly high, due to the relative high average distances of the access terminal to the service from the origin (and of the final destination from the egress terminal). Finally, the goodness of fit statistic is acceptable ($\rho^2=0.482$).

Table 6. Parameters calibration of modal choice models for work and study purposes.

<i>Mode</i>	<i>Attributes</i>	<i>Model</i>			
		<i>Work</i>		<i>Study</i>	
		β	t-statistics	β	t-statistics
Bus	$t_{a/e}$	-1.437	-12.8	-3.687	-13.5

	t_b	-0.477	-8.0	-1.775	-13.1
	C	-0.054	-4.9	-0.408	-12.7
	Inter	-0.030	-8.0	-0.026	-6.6
	ASA	-0.749	-12.0	--	--
Rail	$t_{a/e}$	-1.437	-12.8	-3.687	-13.5
	t_b	-0.477	-8.0	-1.775	-13.1
	C	-0.054	-4.9	-0.408	-12.7
	Inter	-0.030	-8.0	-0.026	-6.6
	ASA	-1.147	-16.4	-0.883	-16.7
Mixed	$t_{a/e}$	-1.437	-12.8	-3.687	-13.5
	t_b	-0.477	-8.0	-1.775	-13.1
	C	-0.054	-4.9	-0.408	-12.7
	Inter	-0.030	-8.0	-0.026	-6.6
	t_t	-0.922	-3.4	-0.458	-2.5
	%rail	1.737	2.8	--	--
	ASA	-3.977	-7.4	-3.533	-14.2
Car	t_b	-0.477	-8.0	--	--
	C	-0.054	-4.9	--	--
ρ^2			0.482		0.338
V.O.T.(a/e)			25.75		9.04
V.O.T.(b)			7.50		4.35

As far as concern the model for study purpose, the access/egress and cost parameters are greater than the previous case. The values of the time are lower, as expected. Finally, the goodness of fit statistic is less than the previous one ($\rho^2=0.338$).

The two specified and calibrated modal demand models are applied to estimate the daily O/D demand matrices for the three transit modes with the current fare system (not integrated linear distance) and for the three fare scenarios of the integrated zone linear fare system. The results are presented in Table 7. The first observation is that mixed mode in all cases attracts an extremely small number of users; this is due to the lack in the area of any modal/service integration, that make transfers very burdensome. Transit daily demand for current distance fare system is equal to 23128 pax/day. Transit daily demand for scenario 1 ($p_0=0.45$ €; $\beta=0.50$ €/n) of zone fare system is 23136 pax/day; while, for scenarios 2 and 3, where fare parameters are respectively lower ($p_0=0.35$ €; $\beta=0.40$ €/n) and higher ($p_0=0.55$ €; $\beta=0.50$ €/n) than those of scenario 1, demand is respectively 23438 pax/day and 22805 pax/day. Table 7 reports also the demand for each mode and percentage demand variation related to the current fare distance system.

Table 7. Modal demand for each simulated fare systems.

Fare system		Demand [pax/day]				
		Bus	Rail	Mixed	Total	
Zone	Distance	Abs	15067	7681	380	23128
	1	Abs	15026	7724	386	23136
		$\Delta\%$	-0,3	0,6	1,6	0,0
	2	Abs	15262	7780	396	23438
		$\Delta\%$	1,3	1,3	4,2	1.3

3	Abs	14815	7621	369	22805
	$\Delta\%$	-1,7	-0,8	-2,9	-1,4

Abs=absolute demand values, $\Delta\%$ = percentage demand variation related to current distance fare system.

In order to obtain time-varying O/D matrices to be assigned to the run-based network, the simulation period of an average working day (from 4:30 to 20:00) is discretized into 64 time-slices of 15 minutes. A desired arrival time (DAT) at destination and a desired departure time (DDT) from the origin are associated to each time-slice. Then, DAT and DDT distributions for each travel purpose (work and study), assumed to be rigid to the simulated fare system, are obtained on the base of previous researches on the same area (Postorino et al., 2002) and on a similar Italian regional area (NetEngineering, 2001). DAT and DDT distributions for work and study purposes are presented respectively in Figures 5 and 6. In Figure 5 DAT distribution for work purpose has a morning peak value between 7:00 and 7:30 and has very low values after 14:00, while DDT distribution has two peaks at 14:00 and 18:00. Figure 6 shows that DAT and DDT distributions for study purpose are very concentrated with peak values respectively at 8:00 and 13:00.

At this point, as home-living and returning trips are executed inside the average working day, each daily modal O/D matrix is equally divided into two sub-matrices for home-living trips and for returning trips. At the end, each sub-matrix is splitted into 64 time-slice O/D matrices for trip purpose, according to distributions of Figures 5 e 6. For each simulated fare scenario, it is necessary to obtain totally 256 time-slice O/D matrices.

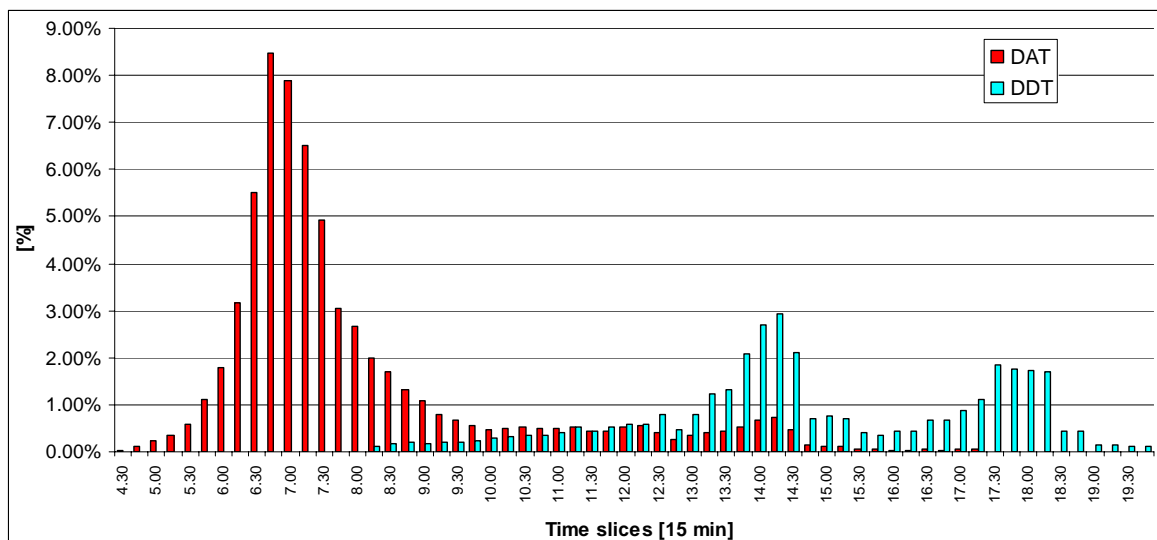


Figure 5. DAT and DDT distributions for work purpose.

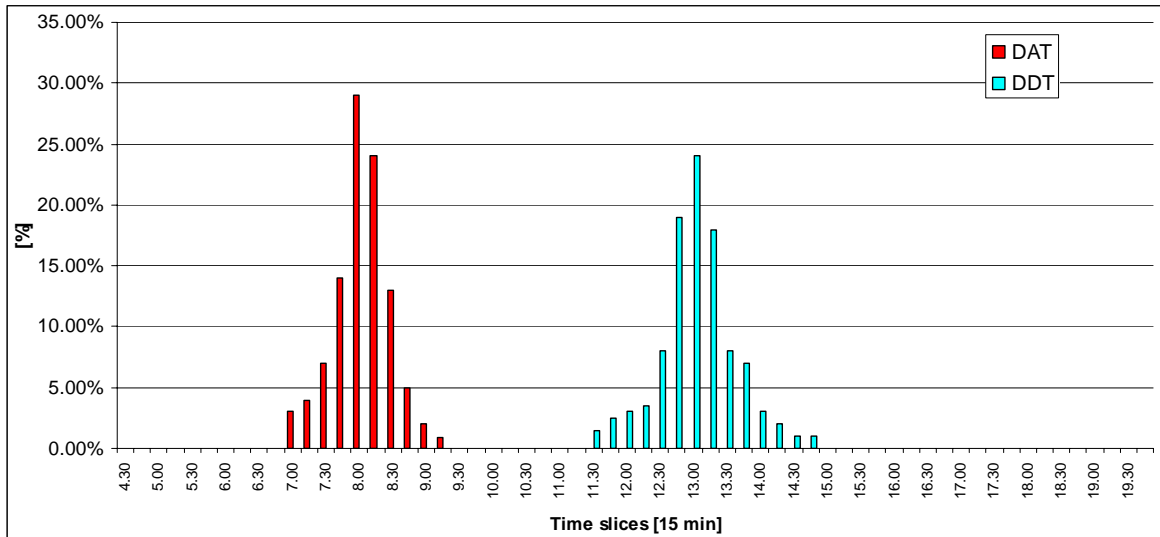


Figure 6. DAT and DDT distributions for study purpose.

Concerning path choice simulation, path choice set is composed of paths selected according to some criteria related to DDT from origin, DAT at destination, maximum earliness and lateness, accepted from users (Florian, 2003). Systematic utility for each path is a generalized cost given from a weighted sum of time and monetary additive costs: access and egress times ($t_{a/e}$), on-board time (t_b), boarding/transfer time (t_t), schedule penalty, fare (p). Generalized cost for path k (C_k) is specified, for a given DDT from origin, as follows:

$$C_k(DDT) = \beta_{a/e} t_{a/e} + \beta_b t_{b,k} + \beta_t t_{t,k} + \beta_c p_k + \beta_{EDT} EDT_k + \beta_{LDT} LDT_k \quad (14)$$

and for a given DAT at destination:

$$C_k(DAT) = \beta_{a/e} t_{a/e} + \beta_b t_{b,k} + \beta_t t_{t,k} + \beta_c p_k + \beta_{EAT} EAT_k + \beta_{LAT} LAT_k \quad (15)$$

with schedule penalties given by:

- EDT_k and LDT_k , Early Departure Time and Late Departure Time (difference between DDT and the scheduled departure time);
- EAT_k and LAT_k , Early Arrival Time and Late Arrival Time (difference between DAT and the scheduled arrival time).

Obviously, EDT_k and LDT_k attributes in (14) and EAT_k and LAT_k in (15) are mutually exclusive. Maximum earliness and lateness is 60 minutes for a given DDT/DAT both for work and study purposes. Fare for each path k (p_k) depends on the simulated linear fare systems (eq. 11 and 12). It is obtained as sum of:

- access fare component (p_0), associated to the boarding link;
- variable on-board fare component (p_v), associated to the (or some) on-board links.

Fare is, then, converted into generalized cost by means of β_c , which is represented by the inverse of value of time for users.

The values of calibrated parameters β for path attributes are presented in Table 8.

Path choice model is deterministic and fully pre-trip and provides the minimum shortest space-time path on the run-based network from each origin to each destination.

Table 8. Parameters for path attributes.

Parameters		Work	Study
$\beta_{a/e}$	[min ⁻¹]	1.5	1.8
β_b	[min ⁻¹]	1	1
β_t	[min ⁻¹]	10	10
β_{EDT}, β_{EAT}	[min ⁻¹]	2.5	1
β_{LDT}, β_{LAT}	[min ⁻¹]	1	2.5
β_c	[1/€]	5.88	12.05

3.4. Transit assignment

Transit assignment is based on a schedule-based approach on not congested run-based network. It is performed with the support EMME/2© (INRO, 2002) software, which considers a minimum cost path algorithm on a space-time network. As space-time network can become very large, the algorithm generates dynamically the part of the network that is actually needed for the computations (instead of explicitly building the whole network). The algorithm computes paths either forward (starting from the origin), for trips with a desired departure time, or backward (starting from the destination) for trips with a desired arrival time, implicitly generating the minimum cost space-time path for each origin-destination couple (INRO, 2002; Florian, 2003).

3.5. Revenues estimation

Revenues are calculated for each simulated fare scenario and each mode (bus, rail and mixed), considering as inputs loads on runs from transit assignment and fares from fare models (11) and (12).

Revenues are divided considering the access fare component (p_0) and the variable on-board fare (p_v). This last one is calculated according to model (11) for the not integrated distance fare system (with parameters from Table 3) and according to model (12) for the integrated zone fare system (with parameters from Table 4 for each simulated scenario).

Table 9 shows the results of revenues estimation. Total daily revenues for the not integrated distance fare system is equal to 26960 €/day. Total daily revenues for scenario 1 ($p_0=0.45$ €; $\beta=0.50$ €/n) of integrated zone linear fare system is 24550 €/day; while, for scenarios 2 and 3, where access and on-board fare parameters are respectively lower ($p_0=0.35$ €; $\beta=0.40$ €/n) and higher ($p_0=0.55$ €; $\beta=0.50$ €/n) than those of scenario 1, revenues are respectively 19107 €/day and 28849 €/day. Revenues for mixed mode are always negligible, as expected.

Figure 7 shows the percentage differences in daily revenues ($\Delta\%$ revenues) and in daily transit demand ($\Delta\%$ demand) between the three scenarios of the integrated zone linear fare system and the not integrated distance fare system one. Concerning scenario 1, revenues reduction is -29.1%, while transit demand increment is +0.5% (+ 119 pax/day). In scenario 2 there is a reduction of revenues of -8.9%, while transit demand is not changed. Finally, in scenario 3 there is an increment of +7.0% in revenues versus a reduction in transit demand of -0.8% (-182 pax/day).

Table 9. Daily revenues estimation for the simulated fare systems.

Fare system		Revenues [€/day]				
		Bus	Rail	Mixed	Total	
Distance	Access	3375	2719	109	6202	
	On-board	14095	6458	204	20758	
	<i>Total</i>	<i>17470</i>	<i>9177</i>	<i>313</i>	<i>26960</i>	
Zone	1	Access	6762	3476	144	10238
		On-board	10015	4298	171	14313
		<i>Total</i>	<i>16777</i>	<i>7773</i>	<i>315</i>	<i>24550</i>
	2	Access	5307	2696	89	8002
		On-board	8069	3036	132	11105
		<i>Total</i>	<i>13375</i>	<i>5732</i>	<i>221</i>	<i>19107</i>
3	Access	8203	4212	231	12415	
	On-board	11978	4456	199	16434	
	<i>Total</i>	<i>20181</i>	<i>8668</i>	<i>430</i>	<i>28849</i>	

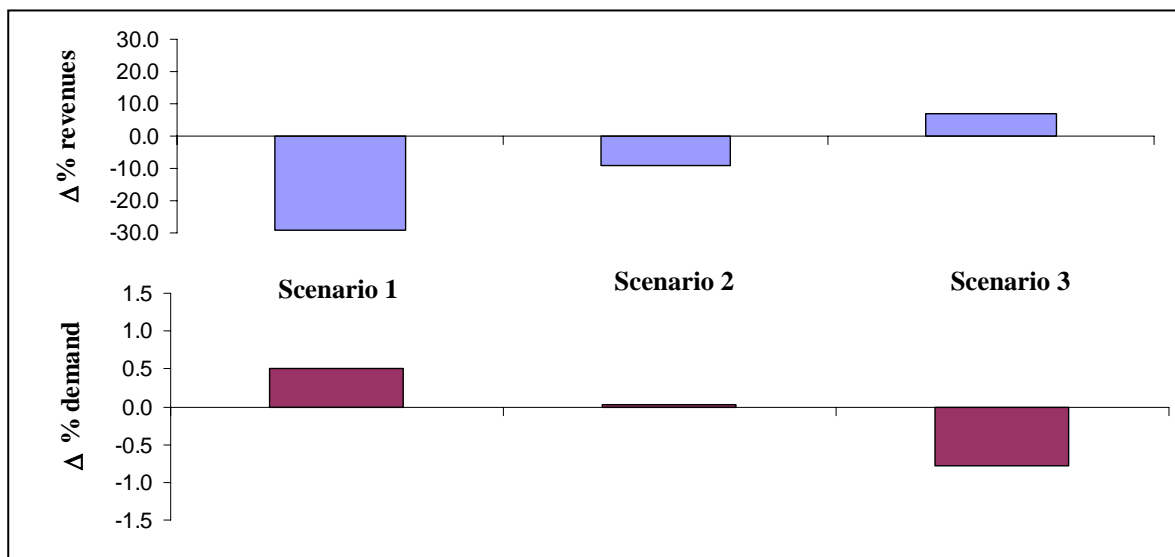


Figure 7. Percentage differences in revenues and demand among the three simulated zone fare systems and the distance one.

4. Conclusions and research perspectives

The paper presents a general procedure for the estimation and evaluation of impacts on demand and on transit management revenues due to the definition of an integrated fare systems in regional transit services. The necessary input data for a modelling approach are pointed out and some fare systems models are specified. Finally, the procedure is applied to the Province of Reggio Calabria, Italy. Two fare systems are simulated and the results in terms of impacts on demand and management revenues are highlighted.

The procedure allows to simulate demand elasticity at mode and path choice dimensions, to simulate and evaluate the impacts of integrated linear fare systems and to explicitly simulate the mixed mode, composed by two transit modes, through the intermodal transfer nodes definition. Non linear fare systems can not actually be simulated, due to their non additive nature. The simulation will be possible, using algorithms able to explicitate paths on the network, which is now very costly, both in terms of CPU time and memory space.

Future research will concern the analysis of integrated fare systems impacts on a more articulated classes of users (occasional), a deeper analysis on demand with the support of

stated preferences investigations, and a more disaggregate analysis of service revenues for each transit company. Moreover, it will be investigated the possibility to simulate integrated non linear fare system, by means of algorithms able to explicitate paths on the network.

References

AA.,VV., 2002. Linee Guida per la programmazione dei servizi di Trasporto Pubblico Locale. Ministero dell'Istruzione, dell'Università e della Ricerca. Laruffa Editore.

Anez, J., de la Barra, T., Perez, B., 1996. Dual graph representation of transport networks. *Transportation Research*, 30B, pp. 209-216.

Babel, L., Kellerer, H., 2003. Design of tariff zones in public transportation networks: theoretical results and heuristics. *Mathematical Methods of Operations Research*. Springer-Verlag, pp. 1-16.

Ben-Akiva, M., Lerman, S.R., 1985. *Discrete choice analysis*, MIT Press, Cambridge, Mass.

Cascetta, E. 2001. *Transportation systems engineering: theory and methods*, Kluwer.

D'Acerno, L., Gallo, M., Montella, B., 2001. Un modello per la determinazione delle tariffe ottimali per il Trasporto Pubblico Locale. *Metodi e Tecnologie dell'Ingegneria dei Trasporti*. Seminario 2001. Edited by Cantarella and Russo, FrancoAngeli, pp. 256-272.

Florian, M., 1998. Deterministic Time Table Transit Assignment. Preprints of PTRC Seminar on National models. Stockholm.

Florian, M., 2003. Finding shortest time-dependent paths in Schedule-Based transit networks: a Label Setting algorithm. *Schedule-Based Dynamic Transit Modelling. Theory and Applications*. Edited by Wilson and Nuzzolo. Kluwer Academic Publishers.

Hamacher, H.W., Schöbel, A., 2003. Design of zone tariff systems in public transportation. *Mathematical Methods of Operations Research*. Forthcoming.

INRO, 2002. EMME/2©, user's manual (release 9.0). Montreal, Canada.

Italian Railways, 1995. *Integrazione tariffaria. Orientamenti tecnico operativi per la progettazione di un sistema tariffario integrato nell'ambito delle grandi aree metropolitane*. Internal Report. Milan.

Gattuso, D., Carbone, G., Chindemi, A., 2002a. Integrazione modale ed unificazione tariffaria del TPL. Esperienze recenti a scala sovracomunale. *Modelli e Metodi per la programmazione dei servizi di Trasporto Pubblico uno stato dell'arte*. Edited by Russo F., FrancoAngeli, pp. 84-100.

Gattuso, D., Carbone, G., Chindemi, A., 2002b. A methodology for fare integration in transit systems: application to an Italian extra-urban area. *Proceedings of AET Conference 2002, 9-12 September 2002, Cambridge*.

Gattuso, D., Carbone, G., Chindemi, A., 2003. Una metodologia per l'integrazione tariffaria nei sistemi di trasporto pubblico: applicazione ad un caso reale. Modelli e metodi per la programmazione dei servizi di trasporto pubblico locale: applicazione a casi reali. Edited by Russo F., FrancoAngeli, Forthcoming.

Gattuso, D., Musolino, G., 2003. Integrazione tariffaria a scala regionale nel TPL. Analisi comparata di cinque esperienze europee avanzate. Trasporti e Territorio. Aprile 2004. Milano.

Montella, B., Gallo, M., D'Acerno, L., 2002. Stato dell'arte sulle strutture tariffarie nelle aziende di TPL. Modelli e metodi per la programmazione dei servizi di trasporto pubblico locale: uno stato dell'arte. Edited by Russo F., FrancoAngeli, pp. 101-116.

NetEngineering, 2001. Il sistema ferroviario metropolitano regionale dell'area centrale veneta. Grafica Atestina-Este. Padova.

Nguyen, S., Pallottino, S., Malucelli, F., 2000. A modeling framework for the passenger assignment on transportation network with time-tables. Transportation Science, 35, pp. 238-249.

Nielsen, O.A., Jovicic, G., 1999. A large scale stochastic timetable-based transit assignment model for route and sub-mode choices. Proceedings of 27th European Transportation Forum, seminar F, Cambridge, England, pp. 169-184.

Nuzzolo, A., Russo, F., Crisalli, U., 2003. Transit network modelling The schedule-based dynamic approach. FrancoAngeli.

Postorino, M.N., Musolino, G., Velonà P., 2002. A methodology for demand evaluation by traffic counts in transit systems: application to an Italian extra-urban area. Proceedings of AET Conference 2002, 9-12 September 2002, Cambridge.

Pratelli, A., Schoen, F., 2002. Un modello di zonizzazione ottimale per sistemi di trasporto pubblico integrati. Proceedings of Conference: "Metodi e tecnologie dell'ingegneria dei trasporti". 10-12 Dicembre 2002, Reggio Calabria. Forthcoming.

Schöbel, A., 1996. Zone planning in public transportation. Advanced Methods in Transportation Analysis. Edited by Bianco and Toth. Springer-Verlag, pp. 117-134.

Schöbel, A., Schöbel, G., 1999. Wabplan. A software tool for design and evaluation of tariff systems. Internal Report.